

# Omnidirectional Back Electret Condenser Microphone Cartridge

Series: **WM-60A**



■ **Features**

- Small microphones for general use
- Back electret type designed for high resistance to vibrations


■ **Sensitivity**

$V_s = 2.0V$ $R_L = 2.2k\Omega$	X: $-46 \pm 3dB$ T: $-44 \pm 3dB$ Y: $-42 \pm 3dB$
------------------------------------	--

■ **Specifications**

Sensitivity	$-44 \pm 5dB$ (0db = 1V/pa, 1kHz)
Impedance	Less than 2 k $\Omega$
Directivity	Omnidirectional
Frequency	20-20,000 Hz
Max. operation voltage	30V
Standard operation voltage	2V
Current consumption	Max. 0.5 mA
Sensitivity reduction	Within -3 dB at 1.5V
S/N ratio	More than 58 dB

■ **Typical Frequency Response Curve**

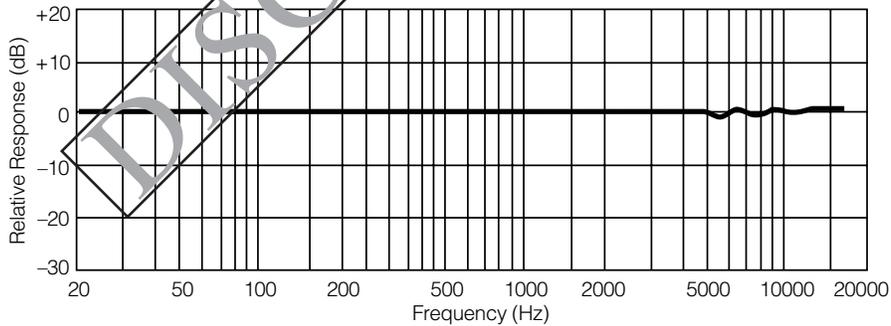

■ **Dimensions in mm (not to scale)**

WM-60A

