

VIV company

Telephone:

Fax:

VAT Registration No.:

X88	AC connector
31	Battery -
30	Battery +
B132	Camshaft position (CMP) sensor
S57	Closed throttle position (CTP) switch
B54	Crankshaft position (CKP) sensor
A136	Crash control module
X1	Data link connector (DLC)
A166	Distributor
S226	Door contact switch, driver
A35	Engine control module (ECM)
K46	Engine control relay
B24	Engine coolant temperature (ECT) sensor
Y104	Evaporative emission (EVAP) canister purge valve
Y28	Exhaust gas recirculation (EGR) solenoid
M12	Fuel pump
K20	Fuel pump relay
A188	Fuel shut-off control module
F	Fuse
F18	Fuse 10A - Sharan
F18	Fuse 15A - Golf/Vento AFT/AKR/AKS
F18	Fuse 15A - Passat/Corrado
F18	Fuse 20A - Golf/Vento ADY/AGG
F18	Fuse 20A - Polo Classic
B72	Heated oxygen sensor (HO2S)
Y56	Idle speed control (ISC) actuator
B151	Idle speed control (ISC) actuator position sensor
A52	Ignition amplifier
T1	Ignition coil
15	Ignition switch - ignition ON
50	Ignition switch - start signal
A162	Immobilizer control module
Y3	Injector
A5	Instrument panel
B25	Intake air temperature (IAT) sensor
Y102	Intake manifold air control solenoid
B69	Knock sensor (KS)
B30	Mass air flow (MAF) sensor
A11	Multifunction control module
K4	Starter motor relay
A198	Supplementary restraint system (SRS) control module
A177	Throttle control unit

Manufacturer: Volkswagen

Model: Golf/Golf Estate (91-98) 1,6

© Autodata Limited 2010

Engine code: AKS

Output: 74 (100) 5800

Valid forever. 22.06.2014


Tuned for: R-Cat

Year: 1996-98

V8 500-ENGI144582

/Autodata

B147	Throttle position (TP) sensor
A57	Transmission control module (TCM)
B33	Vehicle speed sensor (VSS)

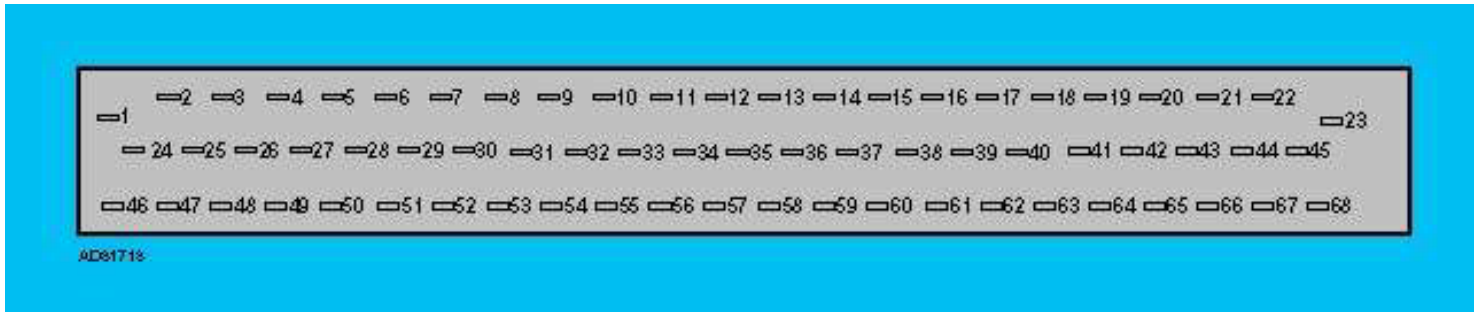

bl = blue	br = brown	el = cream	ge = yellow
gn = green	gr = grey	nf = neutral	og = orange
rs = pink	rt = red	sw = black	vi = violet
ws = white	hbl = light blue	hgn = light green	rbr = maroon
x = braided cable	y = high tension	z = non-cable connection	

NOTE: In certain diagrams (Citroen, Peugeot & Renault), colour codes are replaced by numbers which are used to identify a particular cable and not the colour. In this instance, the cables will be numbered at each end close to the harness connector.

